


Interphone & Doorphone

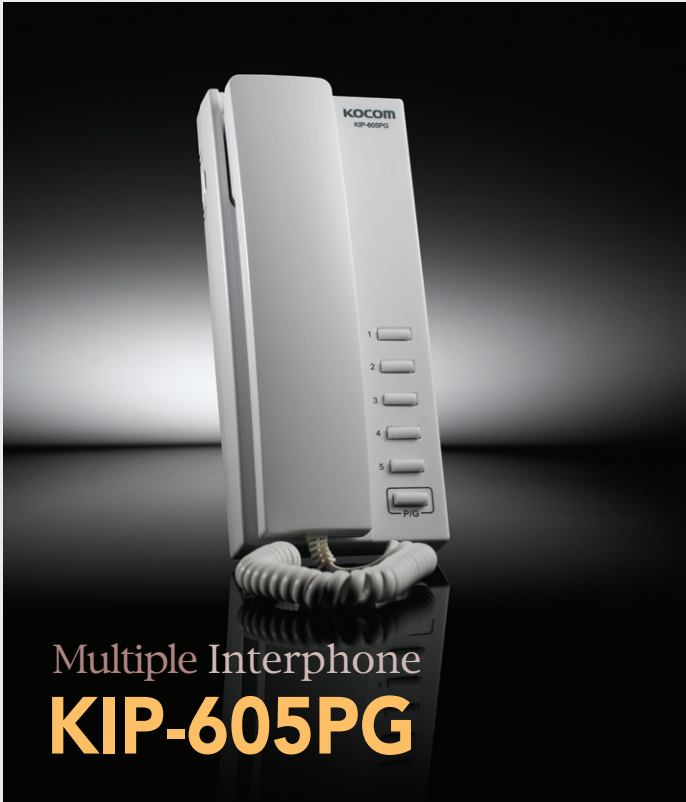


Function

- 5 Ch Multiple Interphone
- Single or Multiple Connection
- All Master Intercom System
- Paging Function
- Gentle Electronic Sound
- Easy Wiring & Installation (Mount on the Wall or Desk)
- Outdoor panel, DS-4M Connection (Option)


Specifications

- Power : DC24V / 1.2A (powered form common power supply)
- Power consumption : Stand by : 0.85W, Max. 1.7W
- Wiring : 4wire
- Max. wiring distance : Ø0.65 single cable : 1Km
- Mount type : Surface mount
- Assurance temperature : 0°C~ +50°C
- Dimension (mm) : 92(W) x 210(H) x 57(D)

Dimension



Wiring Diagram

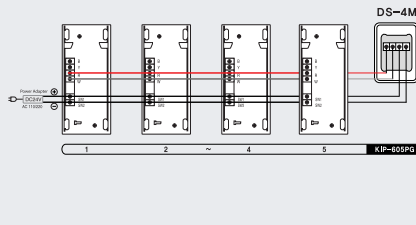


Function

- 11 Ch Multiple Interphone and Doorphone
- Single or Multiple Connection
- All Master Intercom System
- Paging Function
- Gentle Electronic Sound
- Easy Wiring & Installation (Mount on the Wall or Desk)
- Outdoor panel, DS-4M Connection (Option)


Specifications

- Power : DC24V / 1.2A (powered form common power supply)
- Power consumption : Max. 1.7W, Stand by : 0.85W
- Wiring : 4wire
- Max. wiring distance : Ø0.65 single cable : 1Km
- Mount type : Surface mount
- Assurance temperature : 0°C~ +50°C
- Dimension (mm) : 92(W) x 210(H) x 57(D)

Dimension



Wiring Diagram

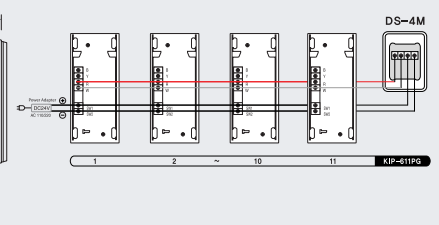

System Diagram



Option



[Power Supply]

- PS-M1
- Input : AC 100V~130V or 220V~240V
- Output : DC 24V / 1.2A



[Outdoor Panel]

DS-4M