




DESIGNED FOR SECURE  
ROOMS STORING  
**CONFIDENTIAL  
DOCUMENTS AND  
LIMITED AMOUNT OF  
CASH AND VALUABLES**

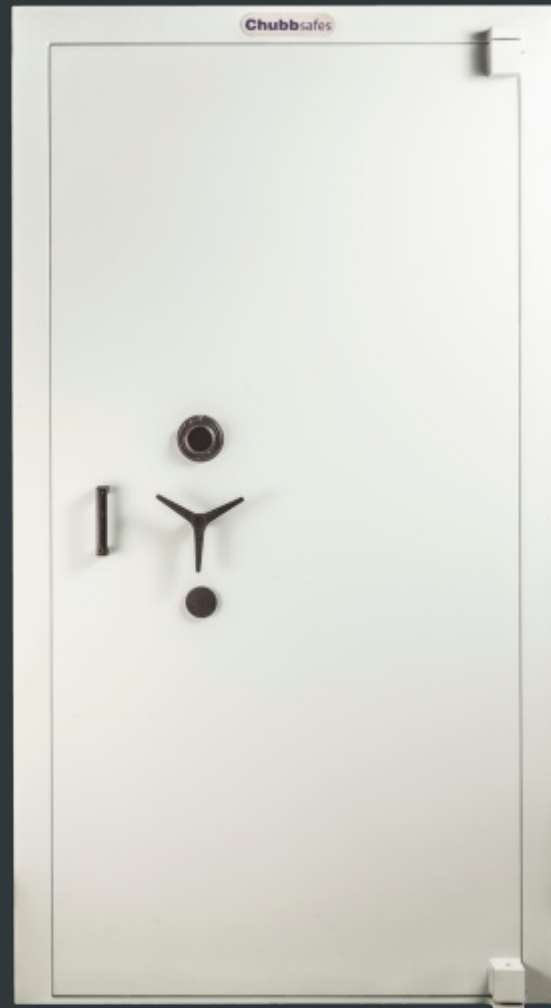

# SECURITY BOOKROOM DOOR

## BURGLARY RESISTANT PROTECTION



### KEY FEATURES

- Overall Door thickness of:
  - 124mm for Class A Door
  - 121mm for Class B Door
- The protective layer consists of a steel door plate of:
  - 12mm for Class A Door
  - 9mm for Class B Door
- Secured by 4 active front bolts with diameter of 32mm and full height fixed rear docking bolt.
- Both Doors are secured by a 3-wheel Keyless Combination Lock and a 8-lever double bitted Key Lock as standard. Both locks operated independently.
- The Keyless Combination Lock and KeyLock are protected by 2 relockers. Any forced attempt to dislodge the locks would activate these secondary locking devices and restricts the movement of the internal boltwork system.
- The relocker is further protected by drill resistant hard plates.
- The door comes standard with a painted grey primer based finish.

# SECURITY BOOKROOM DOOR

## PRODUCT SPECIFICATIONS

Model	External Dimensions (mm)	Clear Opening (mm)	Wall Opening (mm)	Wall Thickness (mm)	Approx. Net Weight (kg)
Class A	2005(H) x 1100(W)	1892(H) x 814(W)	1962(H) x 1004(W)	200 (inclusive of Plastering)	318 (Door) and 20 (Gate)
Class B	2005(H) x 1100(W)	1892(H) x 814(W)	1962(H) x 1004(W)	200 (inclusive of Plastering)	274 (Door) and 20 (Gate)

### STANDARD LOCKS



#### KEYLESS COMBINATION LOCK

Secured by a 3-wheel Keyless Combination Lock capable of 1,000,000 changes of code. The operation of this lock is simple. The code can be changed easily and security can be maintained over the safe whenever there is a change of staff.

#### KEYLOCK

The door is secured by a 8-lever double bitted key lock from Germany

### OPTIONS



#### LOCKS


- Electronic lock
- A Dial Check Lock can be fitted as an option to the combination lock
- Two or three movement Time Lock may be fitted as an additional requirement



#### DAY GATE

An Optional Day Gate can be fitted to the door for ventilation during the day or as control when the door is open. The Day Gate is secured by two high security 5-lever Mortice Deadlocks.

### “WRAP AROUND WALL” FRAME



Door frame is fabricated from steel sections, bent to form a single structure. Vestibule side frames at full height of the door are attached to the frame and grip the inside of wall.

This design provides stronger resistance against attacks to the door.

### WHEN ORDERING, PLEASE STATE:

- Thickness of R.C wall
- Hung of door required
- If to be installed in multi-storey building, state floor level
- Path of access to where door is to be installed.

### NOTE

Chubbsafes Doors are designed primarily against physical attack, but for recommended storage of paper documents and computer media, ask for details of Chubbsafes Fire Resistant Protection Cabinet or Chubbsafes Data Cabinets.

Authorised dealer

GUNNEBO MALAYSIA SDN BHD (877658-K)  
Suite 13A.01, Level 13A,  
Menara Summit,  
Persiaran Kewajipan USJ 1,  
47600 Subang Jaya,  
Selangor Darul Ehsan  
Tel: 03-8024 3050  
Fax: 03-8024 3051  
Website: [www.gunnebo.com.my](http://www.gunnebo.com.my)  
Email: [info.my@gunnebo.com](mailto:info.my@gunnebo.com)

[www.chubbsafes.com.my](http://www.chubbsafes.com.my)