

ES602

ATTENDANCE MACHINE



PRODUCT CHARACTERISTICS


- Dynamic face recognition: Swift access with a glance
- Dual connectivity (WiFi & wired): Stable data transfer
- Multiple verifications (face, card, fingerprint): Effortless management

FINGERPRINT ATTENDANCE AND ACCESS CONTROL ALL-IN-ONE MACHINE

ES602 FINGERPRINT ATTENDANCE AND ACCESS CONTROL ALL-IN-ONE MACHINE

Screen	2.8 inches
Data Communication Methods	TCP/IP, Wi-Fi, USB
Verification Methods	Face recognition, Card swiping, Fingerprint recognition
User Capacity	1000
Face Capacity	1000
Fingerprint Capacity	1000
Card Capacity	1000
Record Capacity	150,000
Physical Interfaces	Power supply, Switch quantity, Door release button, Doorbell, Ethernet, Wiegand input/output
Recognition Distance	< 2M
Recognition Speed	< 1S
Power Input	12V 2A
Operating Temperature	0°C - 45°C
Operating Humidity	20%RH - 80%RH
Product Dimensions	210×32×90MM
Outer Box Dimensions	35.5×28.5×18.5CM
Packaging Specification	1/-/4

Visible-light dynamic
face real-person
liveness detection

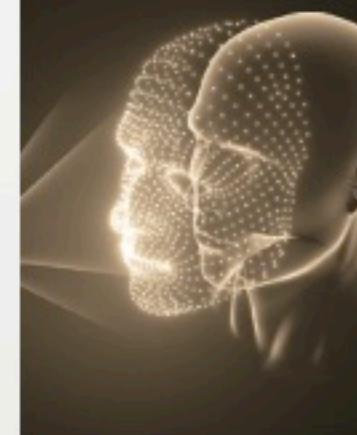

Membrane-free
optical fingerprint for
instant recognition



Open SDK
interface

